

36W LED PANEL LIGHT

HIGH POWERED

300x1200 mm |IP41Rating SKU:SRPL300X1200-36WH

INFORMATION

Measuring 300mm x 1200mm, this IP41 rated Philips 36W panel light typically replaces 4 x 600mm T8/T5 fluorescent tubes lights set in 300x1200 grids. Which is why they're the popular lighting choice for hotels, factories, offices, schools, colleges, hospitals and the like. Energy use will be reduced by up to 50% and you'll notice a dramatic improvement in light quality.

While fluorescent tubes tend to flicker towards the end of their life, panel lights maintain their brightness and quality for a much longer period and these Philips 36w units use a non-flicker LED driver for improved uniformed light distribution with no interference.

They also last far longer. This 36W panel will give you 49,999 hours of service, which is up to 20 times longer than your older light source.



FEATURES

- Colour Option (CCT):3000K,4000K, 6000K
- Lumens: 4320 + / - 5%
- Beam angle: 120 Degree
- Life span: 49,999Hrs
- IPRating: IP41
- CE&RoHS Certified
- 5 years warranty
- Philips flicker free driver
- High Lumen Efficiency
- TP(b) Test Report



TECHNICAL PARAMETER

- Input: AC200-240V 50/60Hz 800ma
- Output Current: DC27-42V
- LED Type: 4014 SMD LED
- Output Power: 36W
- Light Guide Plate (LGP): PMMA
- Diffuser Material: PS

Philips is constantly developing and improving its products. For this reason, all product descriptions are intended as a general guide and we may change specifications time to time in the interest of product development, without prior notification or public announcement. Data in this sheet has been obtained in controlled experimental conditions. However, Philips cannot accept any liability arising from the reliance on such data to the extent permitted by law.

APPLICATIONS

- Hotels
- Conference/Meeting rooms
- Factories and
- offices
- Schools, colleges, universities and hospitals



36W LED PANEL LIGHT

HIGH POWERED

300x1200mm | IP41 Rating

SKU: SRPL300X1200-36WH


SPECIFICATIONS

Model#	CCT	Lumen (1m)	CRI	Beam angle	Voltage	PF	Weight (kg)
SRPL300X1200-36WH	3000K	3930	>80	120°	AC200-240V	≥0.95	3.0kg
SRPL300X1200-36WH	4000K	4320	>80	120°	AC200-240V	≥0.95	3.0kg
SRPL300X1200-36WH	5000K	4320	>80	120°	AC200-240V	≥0.95	3.0kg
SRPL300X1200-36WH	6000K	4710	>80	120°	AC200-240V	≥0.95	3.0kg



PRODUCT PACKAGING INFORMATION

1. 2 pc per inner box
2. Inner Carton Weight: 6.6
3. Packing Size (LxWxH): 295x1155x55

All dimension units are in millimeters.

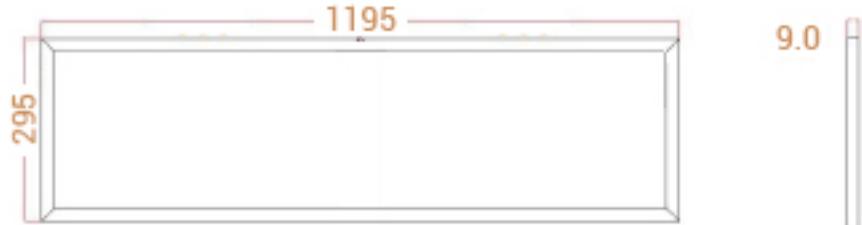

DIMENSIONS (MM)

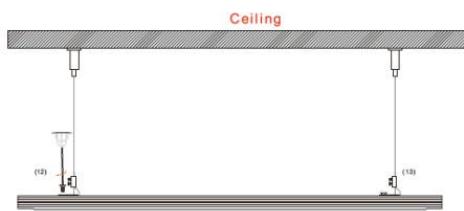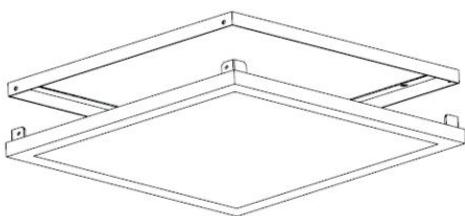

All dimension tolerances are ±0.5mm unless otherwise stated.

INSTALLATION AND ACCESSORIES

- Hanging Kit for suspended installation
- Mounting frames installation
- DALI/TRAIC/0-10v Dimmable driver options