



ALL-ROUND LED-LUMINAIRE

End-cap with buckle design in Performance Series. Lock&Lock has ready throughwiring and connectors on both sides. This reduces the installation costs. The luminaire is equipped with a high quality driver from Osram that gives a high performance and long lifetime. Dimmable function, dali, 3XL, and 5x2.5mm² cables as option.



OSRAM
Driver



140LM/W


Bridgelux LED and Osram driver are used for Lock&Lock series Tri-proof light.

Power adjustment

Choose between 4 different pre-sets







Every luminaire has connectors on both sides which makes the installation easy


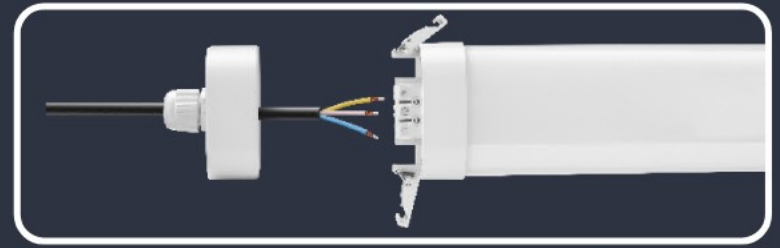


Easily openened and easy rewiring

End cap with ready connectors

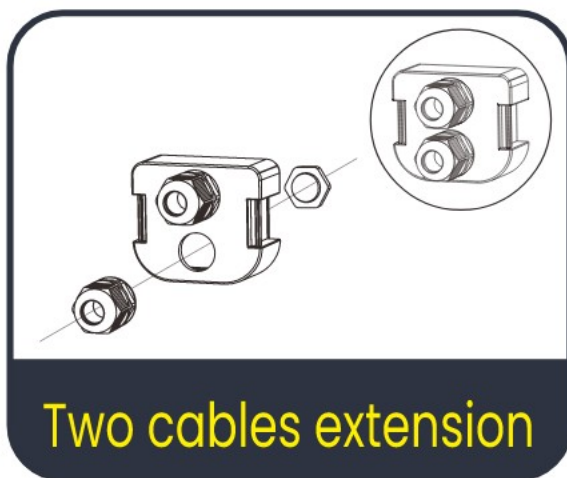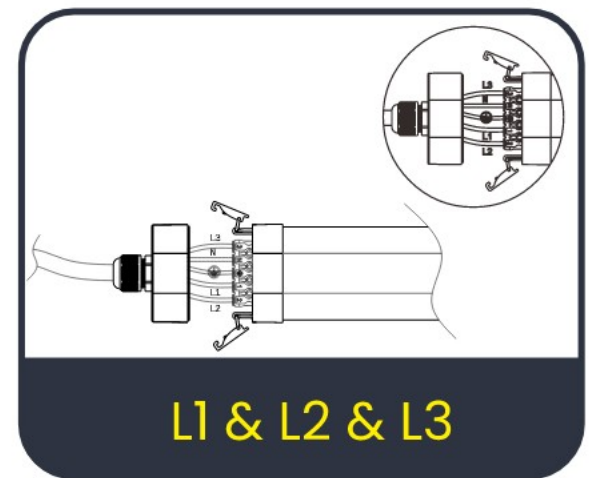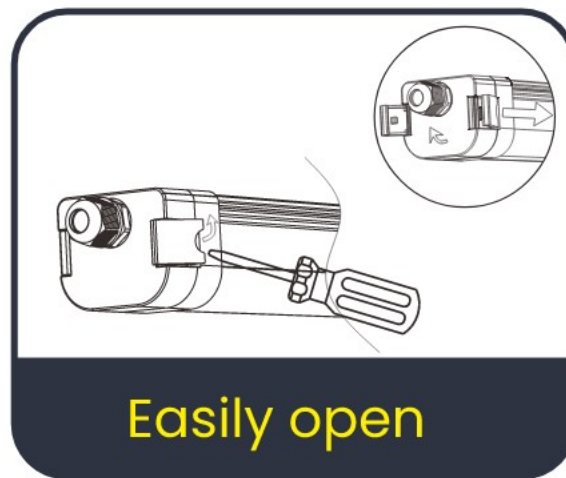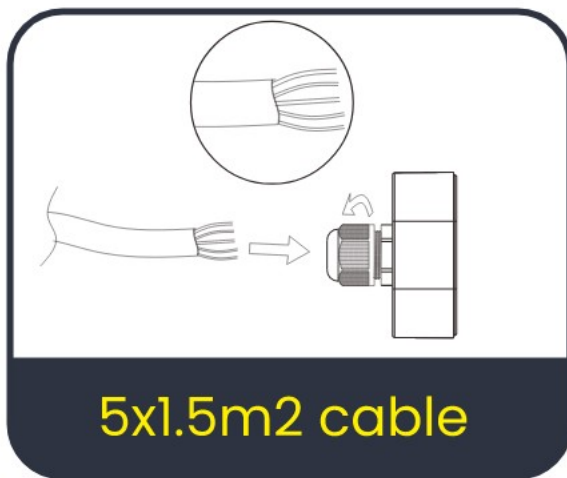

Lock & Lock

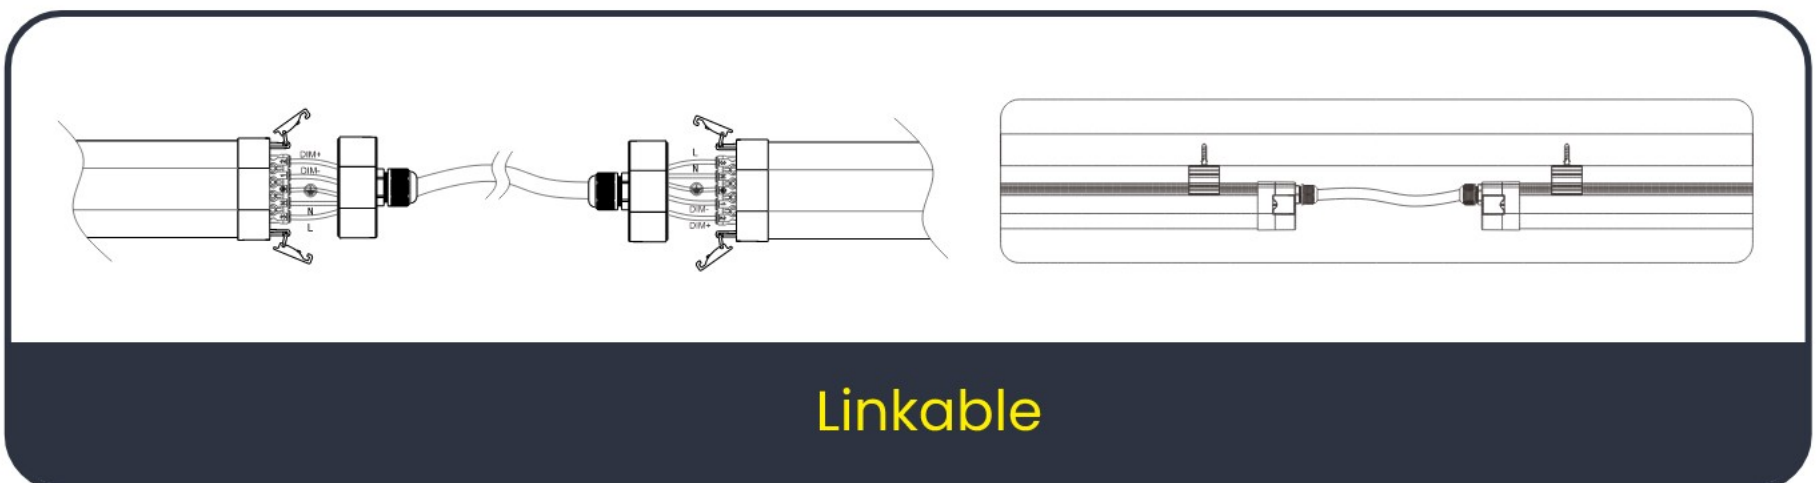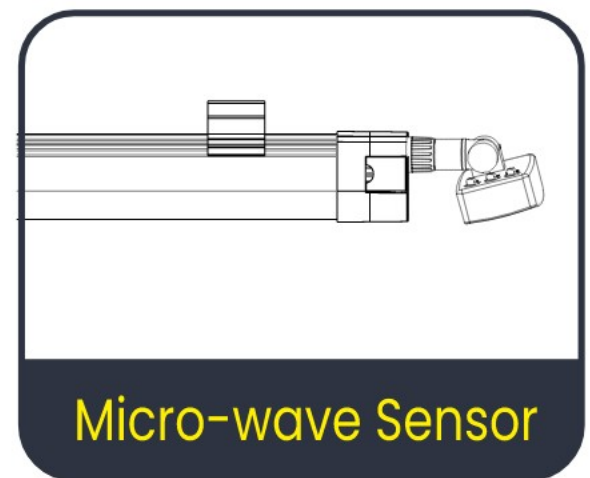



RoHS
compliant


IP65

LM 79

LM 80

TM 21

Lock&Lock
Tri-proof Light Series

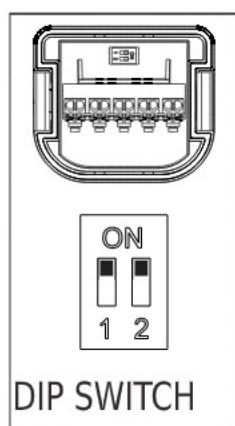

Features

Housing: Plastic With Aluminum Inside

Thermal Conductivity: 226 W/m·K

Led: Bridgelux

CRI: Ra>80

SDCM: <6

Power Factor: >0.95

THD: <15

Driver: Osram

Driver Efficiency: >90%

Protection: OTP, OCP, OVP, SCP

Surge Protection: 2KV

Waterproof: IP65


Impact Test: IK08

Electrical: 220-240V, 50/60Hz

Operating Temperature: -20~40 °C

TM21: L80B10>50,000H


Lifetime: 50,000H

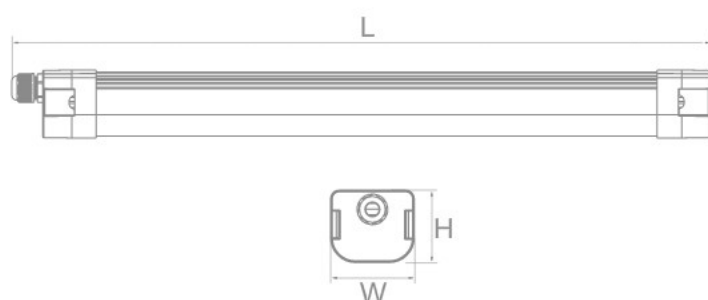

Additional features that can be ordered

ZigBee • PWM • DALI • 0/1~10V • Micro-wave sensor

Optical options:



5 YEARS
WARRANTY

Osram
Driver

Bridgelux
LED

SKU	Watt	Voltage	Lumen	CRI	IP	Dimension
13762	20W	220~240V	2800LM	>80	IP65	L659*W74*H64MM
13763	40W	220~240V	5600LM	>80	IP65	L1221*W74*H64MM
13901	60W	220~240V	8400LM	>80	IP65	L1502*W74*H64MM